


2 megapixel  
Long range network camera

---

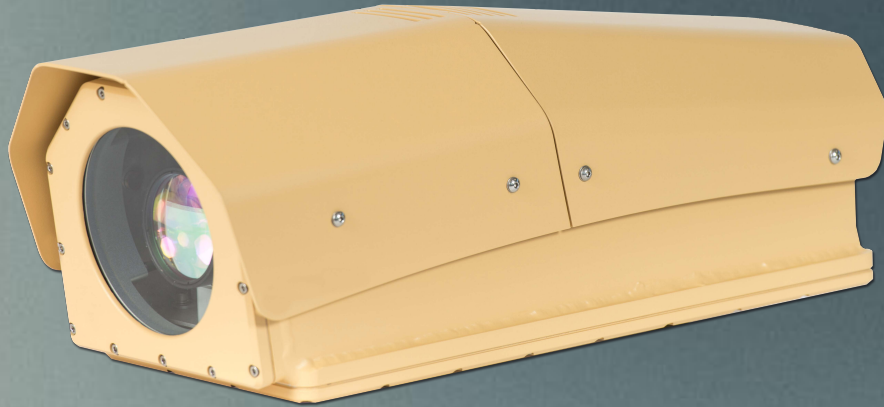

**TLRCS1000A/B / TLRCS750A/B / TLRCS375A/B**

**KEY FEATURES**

- Long range lenses 20-1000mm., 20-750mm., 15-375mm.
- 2 megapixel ultra low lux CMOS sensors
- Zoom / Auto-iris lenses
- H.264/MJPEG video compression
- 2X e-extender
- Hardware Wide Dynamic Range
- Multiple streams
- Real day & night, auto switch ICR filter
- 3DNR Noise reduction
- EIS in A series, optional in B series
- Optical Defog lens
- IP68 waterproof
- Onvif and Profile S compliant

## Specifications:

	Model	TLRCS1000A	TLRCS750A	TLRCS375A	TLRCS1000B	TLRCS750B	TLRCS350B
<b>Camera</b>	Sensor	High sensitivity 1/1,8" CMOS			Ultra high sensitivity 1/2,3" CMOS		
	Min. illumination	0,1Lux F1.4 / BW 0,01 F1.4			0,005 Lux F1.4		
	Day/night	Automatic					
	WDR	100db. hardware			120dB. hardware		
	Lens	20-1000mm.	20-750mm.	15-375mm.	20-1000mm.	20-750mm.	15-375mm.
	2X e-extender	40-2000mm.	40-1500mm.	30-750mm	40-2000mm.	40-1500mm.	30-750mm.
	Zoom	50X	37,5X	25X	50X	37,5X	25X
	FOV Narrow	0,4° (0,2°)	0,55° (0,28°)	1,1°(0,55°)	0,5° (0,25°)	0,67° (0,34°)	1,34°(0,67°)
	FOV Wide	20,4° (10,2°)	20,4° (10,2°)	26,9°(13,5°)	24,8° (12,4°)	24,8° (12,4°)	32,7°(16,4°)
	Type	Autofocus, manual focus (remote), zoom					
<b>Video</b>	Max. resolution	2 megapixel 1920x1080 pixel					
	Max. frame rate	60 (WDR cancelled)			30		
	EIS	Yes			Optional		
	Compression	H.264, MJPEG					
	Streams	Multiple					
	Signal noise	>50dB.					
	Analogue/digital	Both					
	Digital zoom	16x					
<b>Network</b>	Ethernet	1x 10/100 RJ45 Ethernet					
	Protocols	IPv4, RTSP, TFTP, HTTP, RTP, TCP, UDP					
<b>System</b>	Compatibility	Onvif					
	RS485	Yes					
	Defogging	Optical					
<b>General</b>	Working temp.	-32/55°C.					
	Waterproof	IP68 according to MIL-810					
	Heater/Fan	Yes					
	Humidity	95% RH					
	Power	28vDC. (18-32vDC.)					
	Consumption	35W., 120W with heaters on					
	Size (Cm.)	78x24x20	78x24x20	78x24x20	78x24x20	78x24x20	78x24x20
	Weight	16Kg.	14Kg.	13Kg.	16Kg.	14Kg.	13Kg.
	Warranty	1 year					

\* Tanz Security reserves the right to change products or specifications without notice.



Tanz Security S.L.  
Gran Vía 19-21 2 planta  
48001 Bilbao, Spain

Tanz Security Technology Ltd.  
9 Fl, No. 1095, Yucheng Rd.,  
Gushan Dist., Kaohsiung  
80485 Taiwan

www.tanzsecurity.com  
info@tanzsecurity.com  
Tel: +34 944 35 98 41 (HQ)  
Tel: +886 905 186 990 (Support)